


# Standard Duty Steel Lintel

## BSD140


Steel lintel for use in masonry construction for internal load bearing walls 100mm and 140mm. Universal application caters for all loading condition, including direct floor or roof load, concrete floor and point loads. Manufactured from galvanised steel with Catnic's signature black powder coating.

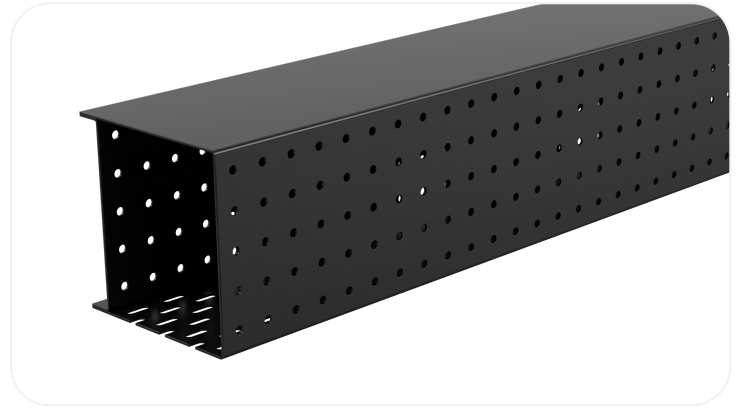

<b>Wall Construction</b>	INTERNAL WALL
<b>Inner Leaf</b>	140
<b>Outer Leaf</b>	N/A
<b>Cavity</b>	N/A
<b>Loading Conditions</b>	STANDARD DUTY

## Specification

Product Code	Standard Length (mm)	SWL (kN)	Weight (kg)	Nominal Height (mm)
BSD1401050	1050	19	7.29	143
BSD1401200	1200	19	8.33	143
BSD1401350	1350	19	9.37	143
BSD1401500	1500	19	10.41	143
BSD1401650	1650	19	11.45	143
BSD1401800	1800	19	12.49	143
BSD1401950	1950	19	13.53	143
BSD1402100	2100	19	14.57	143
BSD1402250	2250	20	19.53	143
BSD1402400	2400	20	20.83	143
BSD1402550	2550	20	22.13	143
BSD1402700	2700	20	23.44	143
BSD1402850	2850	29	37.19	219
BSD1403000	3000	29	39.15	219
BSD1403300	3300	29	43.07	219
BSD1403600	3600	29	46.98	219
BSD1403900	3900	29	66.73	219
BSD1404200	4200	29	71.86	219
BSD1404575	4575	29	78.28	219
BSD1404800	4800	27	82.13	219

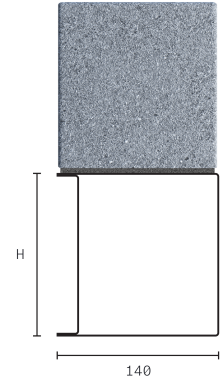

All ratios are shown inner to outer

- The SWL (safe working load) is based on the total UDL (uniform distributed load) over maximum span using 150mm end bearings.
- Standard lengths are available in increments of 150mm at lengths up to 3000mm, 300mm at lengths from 3000mm to 4800mm (including 4575mm, but excluding 4500mm).

## Benefits

- Duplex Corrosion Protection
- Integral Plaster Key

- Made in the UK for a lower carbon footprint and certified to BES 6001 Responsible Sourcing standard.
- Made using lower carbon manufacturing
- It is possible to reuse all of our lintels, providing that they are not damaged. Contact our technical team for more information

**Note:** Whilst the above information is intended to offer general guidance regarding typical applications, it should not be considered as comprehensive. Requirements not fully covered by the above should be referred to our technical services department for individual consideration.

### Catnic

Pontypandy Industrial Estate Caerphilly CF83 3GL  
United Kingdom  
+44 (0)29 2033 7900  
[catnic.technical@tatasteeleurope.com](mailto:catnic.technical@tatasteeleurope.com)  
[catnic.com](http://catnic.com)

### Tata Steel UK Limited

18 Grosvenor Place, London, SW1X 7HS  
Registered in England No. 02280000

Care has been taken to ensure that the contents of this publication are accurate, but Tata Steel Europe Limited and its subsidiaries, which includes Tata Steel UK Limited, do not accept responsibility or liability for errors or information that is found to be misleading. Before using products or services supplied or manufactured by Tata Steel Europe Limited and its subsidiaries, customers should satisfy themselves as to their suitability.

© Copyright 2026 Tata Steel UK Limited