


Extreme Load Steel Lintel

CBP130/100

Wall Construction	CAVITY WALL
Inner Leaf	100
Outer Leaf	100-102
Cavity	130-145
Loading Conditions	EXTREME LOAD DUTY

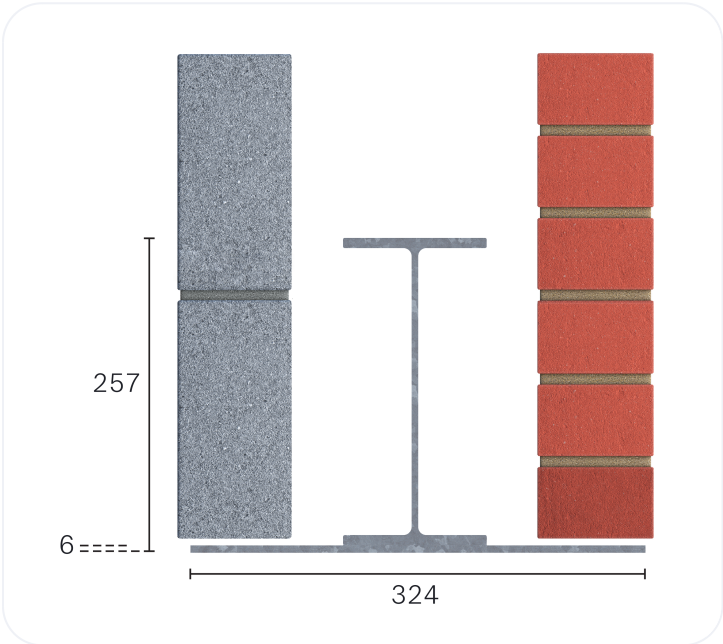

Specification

Product Code	Standard Length (mm)	SWL (kN) 1:1/3:1	Weight (kg)	Nominal Height (mm)
CBP130/1003200	3200	79	129 . 47	263
CBP130/1003300	3300	79	133 . 52	263
CBP130/1003500	3500	79	141 . 61	263
CBP130/1003800	3800	79	153 . 75	263
CBP130/1004050	4050	79	163 . 86	263
CBP130/1004350	4350	79	176 . 00	263
CBP130/1004500	4500	79	182 . 07	263
CBP130/1005800	5800	63	234 . 67	263

- The SWL (safe working load) is based on the total UDL (uniform distributed load) over maximum span using 150mm end bearings.
- Standard lengths are available in increments of 50mm at lengths up to 6600mm.

Note: Whilst the above information is intended to offer general guidance regarding typical applications, it should not be considered as comprehensive. Requirements not fully covered by the above should be referred to our technical services department for individual consideration.

Catnic
Pontypandy Industrial Estate Caerphilly CF83 3GL
United Kingdom
+44 (0)29 2033 7900
catnic.technical@tatasteeleurope.com
catnic.com

Tata Steel UK Limited
18 Grosvenor Place, London, SW1X 7HS
Registered in England No. 02280000

Care has been taken to ensure that the contents of this publication are accurate, but Tata Steel Europe Limited and its subsidiaries, which includes Tata Steel UK Limited, do not accept responsibility or liability for errors or information that is found to be misleading. Before using products or services supplied or manufactured by Tata Steel Europe Limited and its subsidiaries, customers should satisfy themselves as to their suitability.

© Copyright 2025 Tata Steel UK Limited