


Extreme Load Steel Lintel

CXL330

Wall Construction	CAVITY WALL
Inner Leaf	100-115
Outer Leaf	100-102
Cavity	130-145
Loading Conditions	EXTREME LOAD DUTY

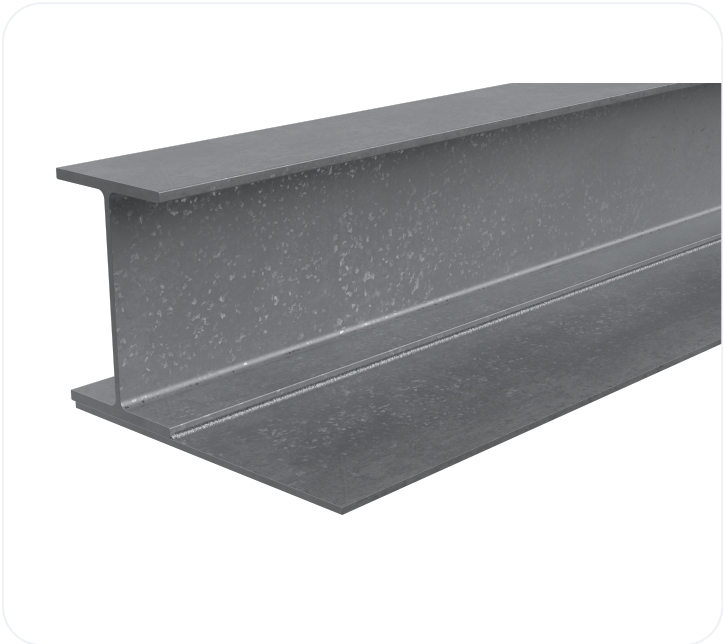

Specification

Product Code	Standard Length (mm)	SWL (kN) 5:1/19:1	Weight (kg)	Nominal Height (mm)
CXL330/2100	2100	88	95.05	213
CXL330/2200	2200	88	99.56	213
CXL330/2250	2250	88	101.84	213
CXL330/2300	2300	88	104.09	213
CXL330/2400	2400	88	108.63	213
CXL330/2450	2450	88	110.89	213
CXL330/2500	2500	88	113.15	213
CXL330/2550	2550	88	115.41	213
CXL330/2600	2600	88	117.67	213
CXL330/2650	2650	88	119.93	213
CXL330/2700	2700	88	122.20	213
CXL330/2800	2800	88	126.73	213
CXL330/2850	2850	88	128.99	213
CXL330/2900	2900	88	131.25	213
CXL330/3000	3000	88	135.78	213
CXL330/3100	3100	83	140.30	213
CXL330/3150	3150	83	142.58	213
CXL330/3200	3200	83	144.83	213
CXL330/3300	3300	83	149.36	213
CXL330/3400	3400	83	153.88	213
CXL330/3450	3450	83	156.14	213
CXL330/3500	3500	83	158.39	213
CXL330/3600	3600	83	162.94	213
CXL330/3700	3700	83	167.45	213
CXL330/3750	3750	83	169.72	213
CXL330/3800	3800	83	171.99	213
CXL330/3900	3900	83	176.52	213

Product Code	Standard Length (mm)	SWL (kN) 5:1/19:1	Weight (kg)	Nominal Height (mm)
CXL330/3950	3950	83	178.77	213
CXL330/4000	4000	83	181.04	213
CXL330/4200	4200	83	190.07	213
CXL330/4250	4250	83	192.36	213
CXL330/4300	4300	83	194.61	213
CXL330/4400	4400	83	199.14	213
CXL330/4500	4500	83	203.67	213
CXL330/4600	4600	83	208.19	213
CXL330/4700	4700	83	212.71	213
CXL330/4800	4800	83	217.24	213
CXL330/4900	4900	78	221.77	213
CXL330/5000	5000	78	226.30	213
CXL330/5100	5100	78	230.82	213
CXL330/5200	5200	71	235.34	213
CXL330/5400	5400	71	244.39	213
CXL330/5450	5450	64	246.65	213
CXL330/5500	5500	64	248.92	213
CXL330/5600	5600	64	253.44	213
CXL330/5700	5700	64	257.98	213
CXL330/5750	5750	56	260.25	213
CXL330/5800	5800	56	262.50	213
CXL330/6000	6000	56	271.54	213
CXL330/6050	6050	52	273.81	213
CXL330/6300	6300	52	285.15	213
CXL330/6400	6400	47	289.65	213
CXL330/6600	6600	47	298.70	213

- the SWL (safe working load) is based on the total UDL (uniform distributed load) over maximum span using 200mm end bearings.
- Standard lengths are available in increments of 50mm at lengths up to 6600mm.

Note: Whilst the above information is intended to offer general guidance regarding typical applications, it should not be considered as comprehensive. Requirements not fully covered by the above should be referred to our technical services department for individual consideration.

Catnic

Pontypandy Industrial Estate Caerphilly CF83 3GL
United Kingdom

+44 (0)29 2033 7900

catnic.technical@tatasteeleurope.com

catnic.com

Tata Steel UK Limited

18 Grosvenor Place, London, SW1X 7HS

Registered in England No. 02280000

Care has been taken to ensure that the contents of this publication are accurate, but Tata Steel Europe Limited and its subsidiaries, which includes Tata Steel UK Limited, do not accept responsibility or liability for errors or information that is found to be misleading. Before using products or services supplied or manufactured by Tata Steel Europe Limited and its subsidiaries, customers should satisfy themselves as to their suitability.

© Copyright 2025 Tata Steel UK Limited