

External Solid Wall Lintels - CN81C

Exterior solid wall lintels

Benefits


- Duplex Corrosion Protection System**
Ensures optimum durability and longevity
- Integral plaster key**
With staggered slots to the inner flange and ribbed underside of insulation
- Continuous insulation**
Maximising thermal efficiency, minimising cold bridging

Box profile

- Saves on brickwork and insulation
- Resists twisting during construction

Instant full load use

Box profile is designed to carry full load of wet masonry as soon as it is installed

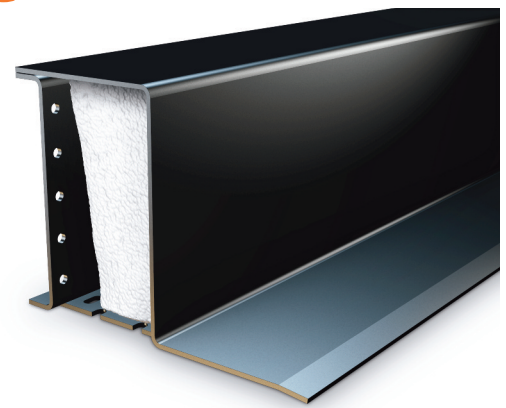


200mm and 215mm Exterior Solid Walls

Heavy Duty



Standard lengths are available in 150mm increments up to 3000mm, 300mm at lengths 3000mm to 4800mm (including 4575mm, but excluding 4500mm).



Note: CN71 and CN81 lintels can also be used as heavy duty wall eaves lintels for 70mm to 100mm cavities.

CN81C

Standard lengths (mm)	2100-2700	2850-3300	3600	3900-4575	4800
SWL (kN)	54	47	39	29	26
Weight (kg/m)	18.5	18.5	18.5	18.5	18.5
Nominal height 'h' (mm)	219	219	219	219	219

The SWL (safe working load) is based on the total UDL (uniform distributed load) over maximum span using 150mm end bearings.

Catnic

Pontypandy Industrial Estate
Caerphilly
CF83 3GL
T: 029 2033 7900
F: 029 2086 7796

01/2015

www.catnic.com

Care has been taken to ensure that the contents of this publication are accurate, but Tata Steel Europe Limited and its subsidiaries, which includes Tata Steel UK Limited, do not accept responsibility or liability for errors or information that is found to be misleading. Before using products or services supplied or manufactured by Tata Steel Europe Limited and its subsidiaries, customers should satisfy themselves as to their suitability.

© Copyright 2015 Tata Steel UK Limited.