


JH47 Timber-Masonry Joist Hanger 47x200mm

Catnic Timber to Masonry Joist Hangers are a single piece non-welded design, with a wide top flange to increase loading capacity on masonry, providing a comprehensive minimum crushing strength of 3.5N/mm². Hangers 150mm deep or above are manufactured with 10mm less to allow for notching and regularisation of timber joists

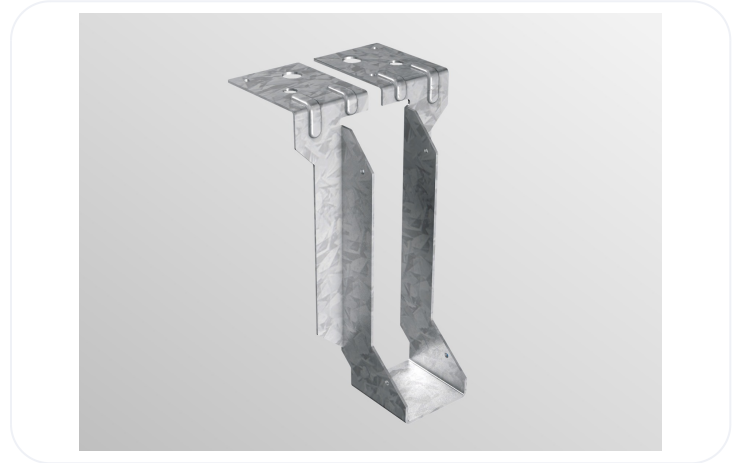

Options

Product Code	Masonry Strength (N/mm ²)	SWL (kN)	Bearing Length (mm)	Joist Width (mm)	Joist Depth (mm)	Leg Length (mm)	Gauge/Thickness (mm)	Weight Per Box (kg)	Weight Per Item (kg)
JH47/200	3.5	10	75	47	200	190	2	11.9	0.476

Information

Manufactured from galvanised steel to BS EN10346.

Catnic Joist Hangers are designed with a 75mm bearing surface and pre-punched side gussets to allow nail fixing into timber joist with 3.75mm x 30mm sheradised square twist nails.

Note: Manufactured from galvanised steel to BS EN10346.

Catnic

Pontypanddy Industrial Estate Caerphilly CF83 3GL United Kingdom
 +44 (0)29 2033 7900 | catnic.technical@tatasteeleurope.com
catnic.com

Care has been taken to ensure that the contents of this publication are accurate, but Tata Steel Europe Limited and its subsidiaries, which includes Tata Steel UK Limited, do not accept responsibility or liability for errors or information that is found to be misleading. Before using products or services supplied or manufactured by Tata Steel Europe Limited and its subsidiaries, customers should satisfy themselves as to their suitability.

© Copyright 2024 Tata Steel UK Limited