


Extreme Load Steel Lintel CBP150/100

Extreme duty steel lintel for use in masonry cavity wall construction, designed to support extreme loads or to be used at long spans in external cavity walls. Non insulated and manufactured from structural steel then post galvanised

Wall Construction	CAVITY WALL
Inner Leaf	100
Outer Leaf	100-102
Cavity	150-165
Loading Conditions	EXTREME LOAD DUTY

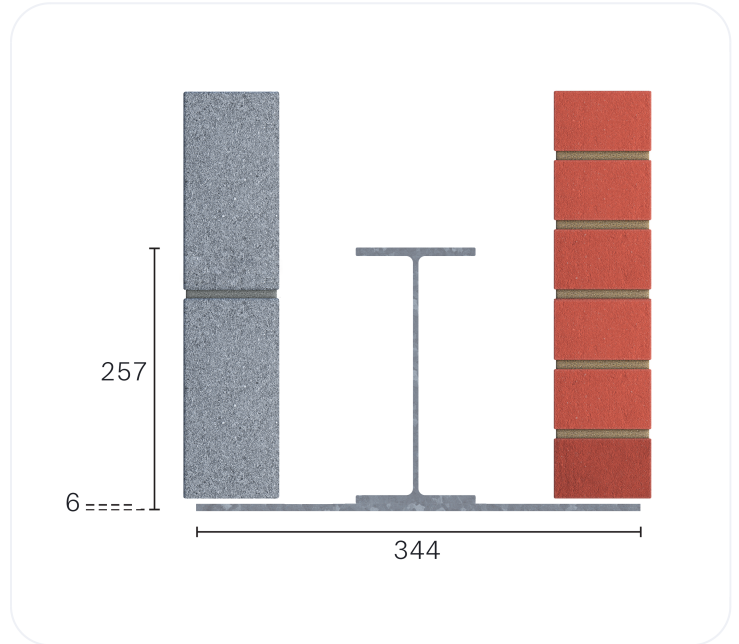

Specification

Product Code	Standard Length (mm)	SWL (kN) 1:1/3:1	Weight (kg)	Nominal Height (mm)
CBP150/1002100	2100	88	86.94	263
CBP150/1002550	2550	88	105.57	263
CBP150/1002700	2700	88	111.78	263
CBP150/1003300	3300	79	136.62	263
CBP150/1003600	3600	79	149.04	263
CBP150/1003900	3900	79	161.46	263
CBP150/1005400	5400	70	223.56	263
CBP150/1005750	5750	63	238.05	263

- The SWL (safe working load) is based on the total UDL (uniform distributed load) over maximum span using 150mm end bearings.
- Standard lengths are available in 150mm increments up to 3000mm length and 300mm increments at lengths above 3000mm.

Benefits

- Hot Dip Galvanised

- Made in the UK for a lower carbon footprint and certified to BES 6001 Responsible Sourcing standard.
- Made using lower carbon manufacturing
- It is possible to reuse all of our lintels, providing that they are not damaged. Contact our technical team for more information

Note: Whilst the above information is intended to offer general guidance regarding typical applications, it should not be considered as comprehensive. Requirements not fully covered by the above should be referred to our technical services department for individual consideration.

Catnic

Pontypandy Industrial Estate Caerphilly CF83 3GL
United Kingdom
+44 (0)29 2033 7900

catnic.technical@tatasteeleurope.com

catnic.com

Tata Steel UK Limited

18 Grosvenor Place, London, SW1X 7HS
Registered in England No. 02280000

Care has been taken to ensure that the contents of this publication are accurate, but Tata Steel Europe Limited and its subsidiaries, which includes Tata Steel UK Limited, do not accept responsibility or liability for errors or information that is found to be misleading. Before using products or services supplied or manufactured by Tata Steel Europe Limited and its subsidiaries, customers should satisfy themselves as to their suitability.

© Copyright 2026 Tata Steel UK Limited